

Dynapac MF2500CL

Mobile feeders




Technical data



Masses

Transport mass	22 t
----------------	------



Dimensions

Transport length	13,500 mm
Transport width	2,550 mm
Transport height	3,100 mm
Front ramp angle	13°



Material hopper

Capacity	6.0 m ³
Dumping height, center	525 mm



Traction

Operating speed, max	25m/min
Transport speed, max	4 km/h



Engine

Manufacturer/Model	Cummins QSB 6.7-C260
Rated power, SAE J1995	194 kW (260 hp) @ 2,200 rpm
Electrical system	24V
Emissions according to	Stage 3A /4 (Tier 3 /4f)
Fuel tank capacity	300 l



Conveyor

Conveyor type	Rubber belt on two chains mounted with metal stiffeners.
Conveyor speed	Variable
Conveyor width	1,200 mm
Feeding height (max/min)	(4,370 mm/1,890mm)
Feed capacity	4000 t/h

Find us locally at www.atlascopco.com


We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac MF2500CL


Mobile feeders



Technical data

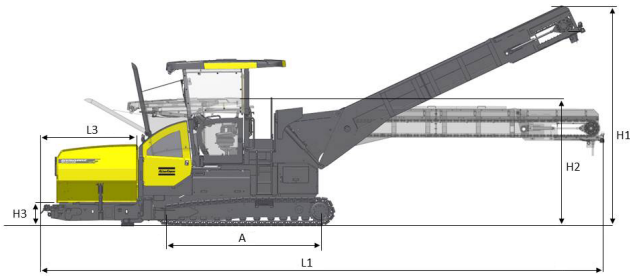

Dimensions	
A. Axle track	3,600 mm
B1. Width, max.	3,345 mm
B2. Width, standard	2,550 mm
B3. Width, wheel track	2,090 mm
C1. Track width	320 mm
H1. Height, max.	5,285 mm
H2. Height, transport	3,100 mm
H3. Height	570 mm
L1. Length	13,500 mm
L3. Length, hopper	2,290 mm

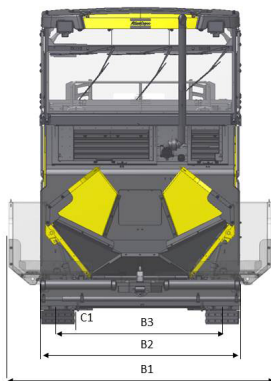

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.