

# DYNAPAC



Part of the Atlas Copco Group

## CC122

### Double drum vibratory rollers



#### Technical data

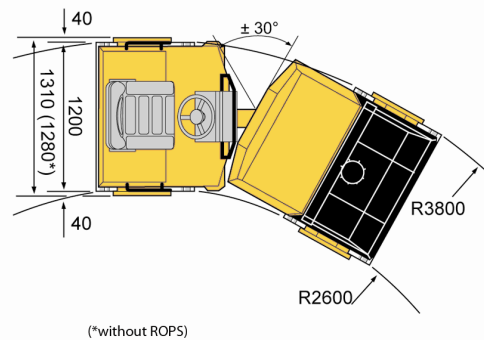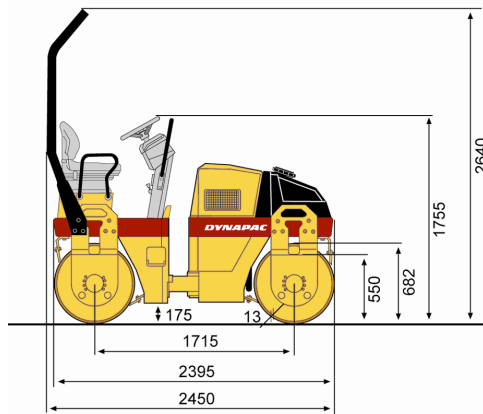

(\*without ROPS)

Masses		CC122
Max. operating mass		5,975 lbs
Operating mass (incl. ROPS)		5,700 lbs
Module mass (front/ rear)		2,800/ 3,000 lbs
Propulsion		
Speed range (mph)		0-10
Vertical oscillation		±10°
Theor. gradeability		45 %
Compaction		
Water tank (l)		160
Static linear load (front/ rear)		59/ 63 lbs/ in
Centrifugal force		6,100 lb
Nominal amplitude		0.020 in
Vibration frequency		3,470 vpm
Engine		
Manufacturer/ Model		Deutz D2011 L02 I
Type		Air cooled diesel
Rated power, SAE J1995		31.0 hp @ 2,800 rpm
Fuel tank capacity		13 gal
Hydraulic system		
Driving		Axial piston pump with variable displacement and servo. 2 radial piston motors with constant displacement.
Vibration		Gear pump/ motors with constant displacement.
Steering		Gear pump with constant displacement.
Service brake		Hydrostatic in forward and reverse lever.
Parking/ Emergency brake		Failsafe multidisc brake in both drums.
Standard equipment		
Standard equipment		Adjustable seat, Anti- spin, Brake release system Fuel gauge, Horn, Hourmeter, Hydraulic pressure checkpoints Interlock, Lifting points, Limited slip on rear axle, Lockable enging hood, Lockable instrument panel cover, Main battery switch, ROPS, Rubber mounted operators platform, Tilt steering wheel, Tractor tire (PD), Vandal protected filler caps, 3" seat belt

Find your local dealer at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.